


VERTICAL FREE-STANDING BAND SEALER WITH TRIMMER

Model: HLC-1120LD

Equipped with a trimmer to cut off excess material

HLC-M1120LD is suitable for sealing all types of thermoplastic materials and bags. This unit is equipped with a trim scrap system for trimming excess material. The vertical configuration is ideal for sealing stand up pouches and liquid-type products. This sealer can be used in a variety of fields such as the food, medical, and cosmetic industries. HLC-1120LD comes with an adjustable sealing head and conveyor suitable providing a wide range of bag heights.

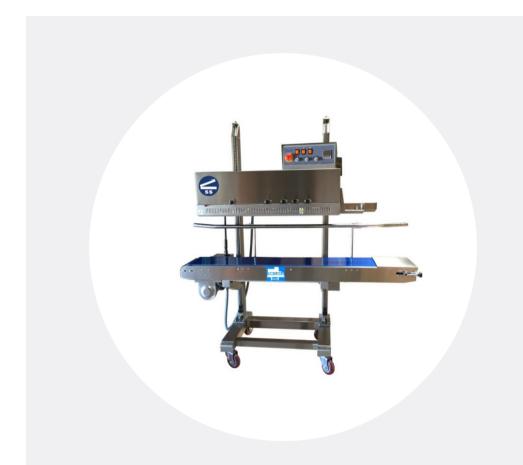

Standard Features:

- Durable stainless steel construction
- Easy to operate minimal operator training
- Fast warm up time
- · Ideal for medium to heavy duty applications
- Trim scrap on material
- Solid state digital temperature controller to maintain seal bars at proper temperature for consistent seal quality
- Motorized rubber conveyor for speed control
- Knurled pressure rolls with variable pressure adjustment
- Sealing method constant/direct heat accompanied with a pair each of cooling and heating blocks
- Fully adjustable conveyor
- Unit feeds right to left
- Spare parts includes: PC Board, PTFE belt, wheel belt, fuse, motor brush, heating element, silica gel ring

Options:

- Left to right feed
- Digital counter to keep track of sealed packages
- 220V Voltage

SPECIFICATIONS			
UNIQUE FEATURES	ADJUSTABLE SEALING HEAD TRIMMER		
FEEDING	RIGHT TO LEFT	CONVEYOR SIZE	55" X 10"
POWER	110V / 60Hz	MAX. CONVEYOR LOAD	33-LBS
MOTOR POWER	230W (1/3 HP)	BAG SIZE (FILLED)	3.9" – 27.0"
SEALING SPEED	0-394 INCHES / MIN	DISTANCE FROM CONVEYOR TO FLOOR	19.6" – 41.3"
SEAL WIDTH	10MM	DIMENSIONS	57" X 27" X 58"
TEMPERATURE RANGE	0-300°C	SHIPPING DIMENSIONS	62" X 29" X 69"
SEALING POWER	300 X 2	WEIGHT (LBS)	NET: 344 GROSS: 404



VERTICAL FREE-STANDING BAND SEALER

Model: HL-M1120LD

Equipped with a trimmer to cut off excess material Sealing Head Crank Adjust height of sealing head Guide Bag entry ss guide **Circuit Breaker** the the two the 0 rimmer Moving Conveyor Adjustable height and FRM1120LD speed Heavy Duty Stand Self standing configuration Conveyor Height Crank Adjust height of convevor Casters **Heat Switch** Fan Turns on temperature controller to activate sealing **Power Switch Emergency Stop** CONTINUOUS BAND SEALER **Digital Temp Controller Conveyor Speed Adjustment**