

One 5,000ft roll becomes 17,500ft



- Powered pre-stretch @ 250%
- 59" diameter turntable
- 4,400lb load capacity
- Photo eye seeks pallet load height
- Soft start and stop turntable for unstable loads
- PLC screen with programmable memory
- 110V
- Easy thread design
- Turntable speed 0-14RPM
- Optional features
 - 71" diameter turntable
 - Tower extensions to 105"
 - Base extension to 24"
 - Weigh scale packages

More Details:

SPW-4505-2-HP is a high profile model that can be loaded by forklift only. Ramp not included.
 SPW-4505-2-LP is a low profile model that can be loaded by forklift or pallet jack.

Specifications:

PRODUCTION RATE	30 – 40 LPH	MACHINE DIMENSIONS	97"L X 59"W X 90"H
POWER REQUIREMENTS	110 VOLTS, 1 PHASE, 15 AMP	CARRIAGE ELEVATOR	VARIABLE SPEED ½ HP – DRIVE BELT
MAXIMUM LOAD SIZE	48"L X 48"W x 83"H	CONTROL	PLC CONTROL W/ 5 PROGRAM MEMORY
MAXIMUM LOAD	4,400-LBS	FORK LIFT PORTABLE	YES
TURNTABLE	59" DIAMETER	CE APPROVAL	EXCEEDS OSHA SAFETY STANDARDS
TURNTABLE DRIVE	½ HP AC VARIABLE SPEED 0-14 RPM	PHOTO EYE	WILL SEAK HEIGHT OF PALLET LOAD
FILM CAPACITY	ALL COMMERCIAL 20" WIDE STRETCH FILM	SHIPPING WEIGHT & DIMENSIONS	1,630-LBS 116" X 65" X 307

STRETCH PALLET WRAPPER

Model: *SPW-4505-2-HP* | *SPW-4505-2-LP*



PLC control with 5 program memory



Independent dial controls for

- Turtable speed
- Carriage speed
- Pre-stretch motor




12 load bearing roller supports



Front View



Rear View

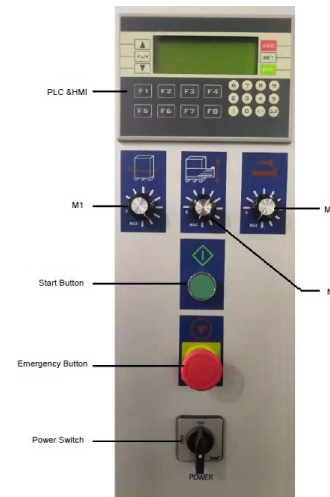

Control Panel

